



THE SPEC LINE
WHAT THE JOB DEMANDS.®

4586

Flexible Roof Asphalt Sealant Meets ASTM D4586

WHAT'S YOUR JOB?

- ASPHALT ROOFING
- ROOF FLASHING
- ROOF REPAIR


THE SPECIFICATION

Meets ASTM D4586 – Standard Specification for Asphalt Roof Cement, Asbestos-Free

THE PRODUCT

DAP® DYNAFLEX® 4586 Flexible Roof Asphalt Sealant is a high performance, asphalt-based sealant ideal for roofing and flashing details in residential and light commercial applications. Use to seal leaks or repairing loose shingles. Resists cracking and sagging. Provides excellent adhesion and can be used on wet surfaces.

- Repairing Minor Roof Leaks
- Wet or Dry Applications
- Durable and Flexible
- Weatherproof seal
- Exterior use only

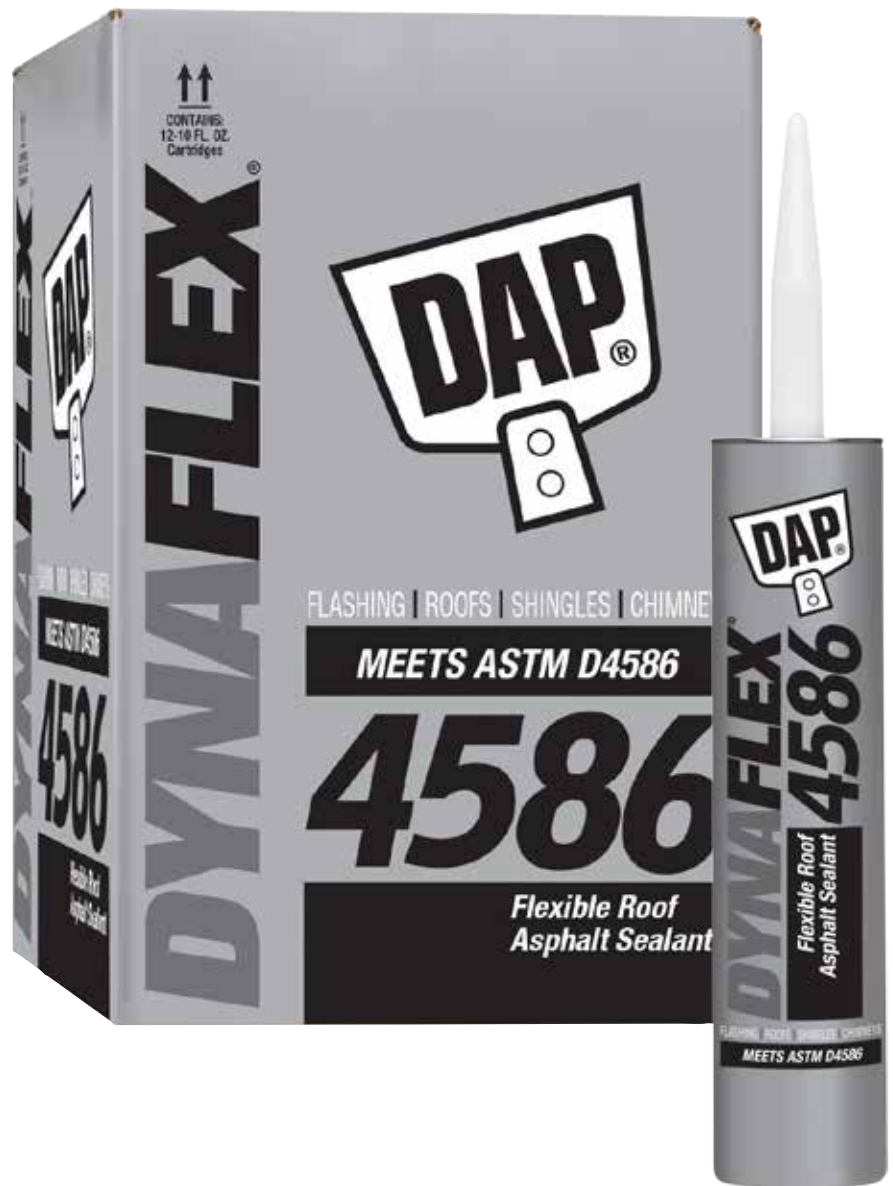



THE SPEC LINE
WHAT THE JOB DEMANDS:

4586

Flexible Roof Asphalt Sealant

Meets ASTM D4586

SATISFACTION GUARANTEED:

DAP will provide replacement product or refund sales price if product fails to perform when used as directed. Call 1-888-DAP-TIPS, with your sales receipt and product container available, to arrange for warranty fulfillment. DAP is not liable for incidental or consequential damages.

Performance Facts

Amount per Cartridge: 298 mL (10.1 fl. oz.)
Recommended Bead: 1/4"
Coverage per Cartridge: 31 lin. Ft.

Recommended Use: Exterior roofing and flashing details to form a weather resistive seal. For bonding roof shingles and general roof repairs.

Not Recommended For: Interior use; joints subject to constant water immersion; expansion control joints or on polystyrene foam.

Features: Adheres to wet surfaces • Resists cracking • UV & Water resistant • Cold weather application

Adheres To: Metal & Aluminum Flashing • Asphalt Roof Shingles • Concrete & Masonry

SPECIFICATIONS:

ASTM D4586 Meets or Exceeds
Type I, Class II

Case Code	Size	Color	Product Code	Case Weight	Case Pack	Case Dimentions LxWxH	Case Volume (cu. ft.)	UPC Check Digit	Cases per Pallet
04586	10.1 oz.	BLACK	04586	14.51 lbs.	12	8" x 6" x 12.5"	0.35	6	105